




FIRE DOOR DAMPER KIT

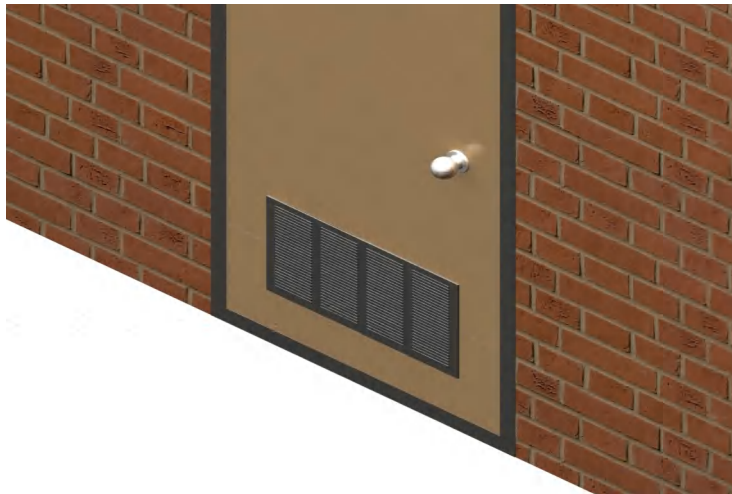

KEY FEATURES AND BENEFITS

Trafalgar's Fire Door Damper Kits are fully fire tested and approved, intumescent fire damper assemblies for use in fire rated doors. Utilising Trafalgar's comprehensive experience with fire doors and extensive knowledge of intumescent technology, these kits are designed to fit inside a standard fire door assembly and are finished with a slimline and modern face fixed cover grille.

Each Trafalgar Fire Door Damper Kit includes the following components:

- 1 x Intumescent damper
- 2 x Silver powder coated cover grilles
- Trafalgar Fyreflex mastic & fittings
- Fixing screws
- Installation instructions

APPLICATION

The Trafalgar Fire Door Damper Kit is fitted to fire tested and proprietary fire doors to allow airflow through them. The kit contains all components for a complete installation as tested to AS1530.4-2005 in accordance with AS1905.1. Suitable for indoor use only.

Standard sizes are:

- 600 x 600mm
- 600 x 300mm
- 450 x 450mm

- Known and trusted brand - Benchmark Quality
- High air flow intumescent technology
- Suits maxi or mini doors
- Suitable for new or existing doors
- No moving parts:
 - Highly durable
 - No maintenance
- Bi directional air flow
- For up to 4 hours fire rating dependent on fire door type
- For further information on these products, contact Trafalgar

Trafalgar reserves the right to change specifications without notice. Please check with your supplier at the time of order.

The information contained in this brochure was correct at the time of printing. E&OE

Trafalgar is the well respected brand, synonymous with the supply of engineered solutions for the containment of fire, smoke and sound. As the foremost Australian owned supplier of passive fire protection systems, Trafalgar's products have been specified and installed into Australian buildings for over 60 years.



FIRE DOOR DAMPER KIT

Nominal Size	Cut Out Size	Fire Resistance Level For Mini Doors (FRL)	Fire Resistance Level For Maxi Doors (FRL)
600x600mm	610x610mm	XXXXX	XXXX
600x300mm	610x310mm	-/120/30	XXXX
450x450mm	460x460mm	-/240/30	-/240/30

PRODUCT DESCRIPTION


COLOUR / APPEARANCE - Silver powder coated finish on cover grille.

INSTALLATION - The fire door is to be cut-out to have a 5mm perimeter clearance and Trafalgar Fyreflex sealant used in the perimeter gaps of both sides of door. The kit is to be installed as per published installation instructions.

MAINTENANCE - Trafalgar Fire Door Damper Kits require no maintenance.

TESTING - Trafalgar's Fire Door Damper Kits are fire tested and fully approved to AS1530.4 & AS4072.1 for applications in both maxi and mini thicknesses of fire doors.

ALSO AVAILABLE - Trafalgar also offers a range of damper systems to suit wall, floor and ceiling applications.

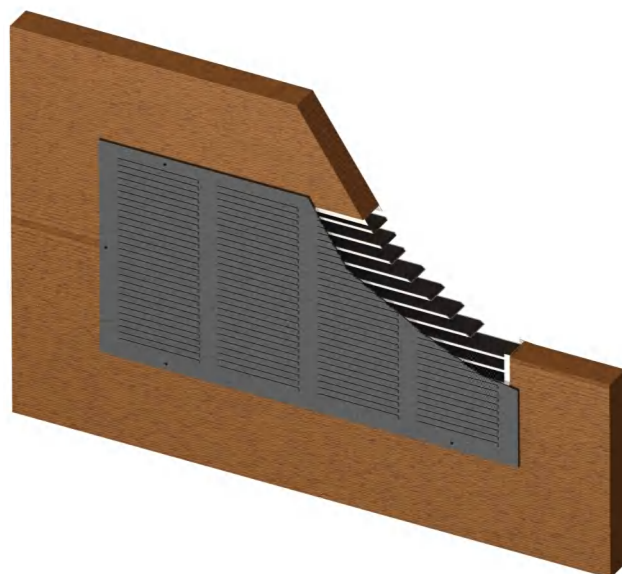

SPECIFICATION

All installations must be as per installation instructions so as to maintain the fire ratings published in accordance with AS1530.4 and AS4072.1

Trafalgar reserves the right to change specifications without notice. Please check with your supplier at the time of order.